



**120x120x32mm/4.7x1.3inch,
Quiet Fan, 82~25 CFM**

TA1232

General specifications



- Motor: Shaded pole, inner rotor, single phase impedance protected design
- Motor Protection:
- Frame: Aluminum die-cast, black color cosmetics
- Impeller: Plastic, rated UL94V-0
- Bearing: Two ball bearings. (Sleeve bearing on request only)
- Rotation: CCW view from label side
- Operating Temp: Ball bearing ambient -20C~+80C, for sleeve -10~+40C
- Storage Temp:
- Life Expectancy: MTBF life test for ball bearing 80,000 hours at 45C, 50,000 hours at 60C
- Dielectric Strength: Over 1 min.at 1,500 VAC, 0.5mA, 50/60 Hz
- Insulation Resistance: Over 100 Mega Ohm at DC 500V
- IP Protection:
- Connection: Wire lead or Terminal flat pin connecting for choice
- Weight: 410g (0.9 Lbs)

Model No.	Rated Voltage	Voltage Range	Freq.	Input Power	Ref. Speed	Max. Airflow	Max. Static Pressure	Noise
	VAC	VAC	Hz	Watt	RPM	CFM	Inch/H2O	dB(A)
TA1232-H-110	115	100~120	50/60	16/14	2400/2950	63/82	0.21/0.28	38
TA1232-M-110	115	100~120	50/60	12/10	2200/2400	58/68	0.19/0.23	32
TA1232-L-110	115	100~120	50/60	9/7	1600/1400	43/40	0.14/0.13	22
TA1232-XL-110 *very quiet fan	115	100~120	50/60	9/7	1000/900	30/25	0.10/0.08	18~15
TA1232-H-220	230	200~240	50/60	16/14	2400/2950	63/82	0.21/0.28	38
TA1232-M-220	230	200~240	50/60	12/10	2200/2400	58/68	0.19/0.23	32
TA1232-L-220	230	200~240	50/60	9/7	1600/1400	43/40	0.14/0.13	22
TA1232-XL-220 *very quiet fan	230	200~240	50/60	9/7	1000/900	30/25	0.10/0.08	18~15
TA1232-H-110/220 dual voltage	115 230~240	100~120 200~240	50/60	16/14	2400/2950	63/82	0.21/0.28	38
TA1232-H-24	24	24~26	50/60	16/14	2400/2950	63/82	0.21/0.28	38
TA1232-H-380	380	380~420	50/60	16/14	2400/2950	63/82	0.21/0.28	38
TA1232-H-440	440	440~480	50/60	16/14	2400/2950	63/82	0.21/0.28	38

Related Product Information

Please see our related items below for suggested products to use with this item:


- Metal Fan Guard: TWG-120
- Plastic Fan Guard: TPG-120
- Plastic Fan Filter: TFK-120-30, TFK-120-45
- Metal Fan Screen: TMS-120

Related Technical Information

-Optional Function Leads:

- Tachometer, speed sensor pulses 5V, input 4.5~27 VDC, 1 signal each revolution, or 2 signals each revolution available on request. Function-T
- AC Alarm Fan, DC Power supply alarm output, open collector or TTL available. Function-L Alarm DC input
- Fan abnormal speed alarm, Programmable CPU AC Power alarm output, open collector or TTL available on request. Function-P Programmable CPU Alarm
- AC Fan Dual Voltage Wiring Diagram : AC Dual Fan Voltage 115/230

Fan Performance Curves and Dimensions

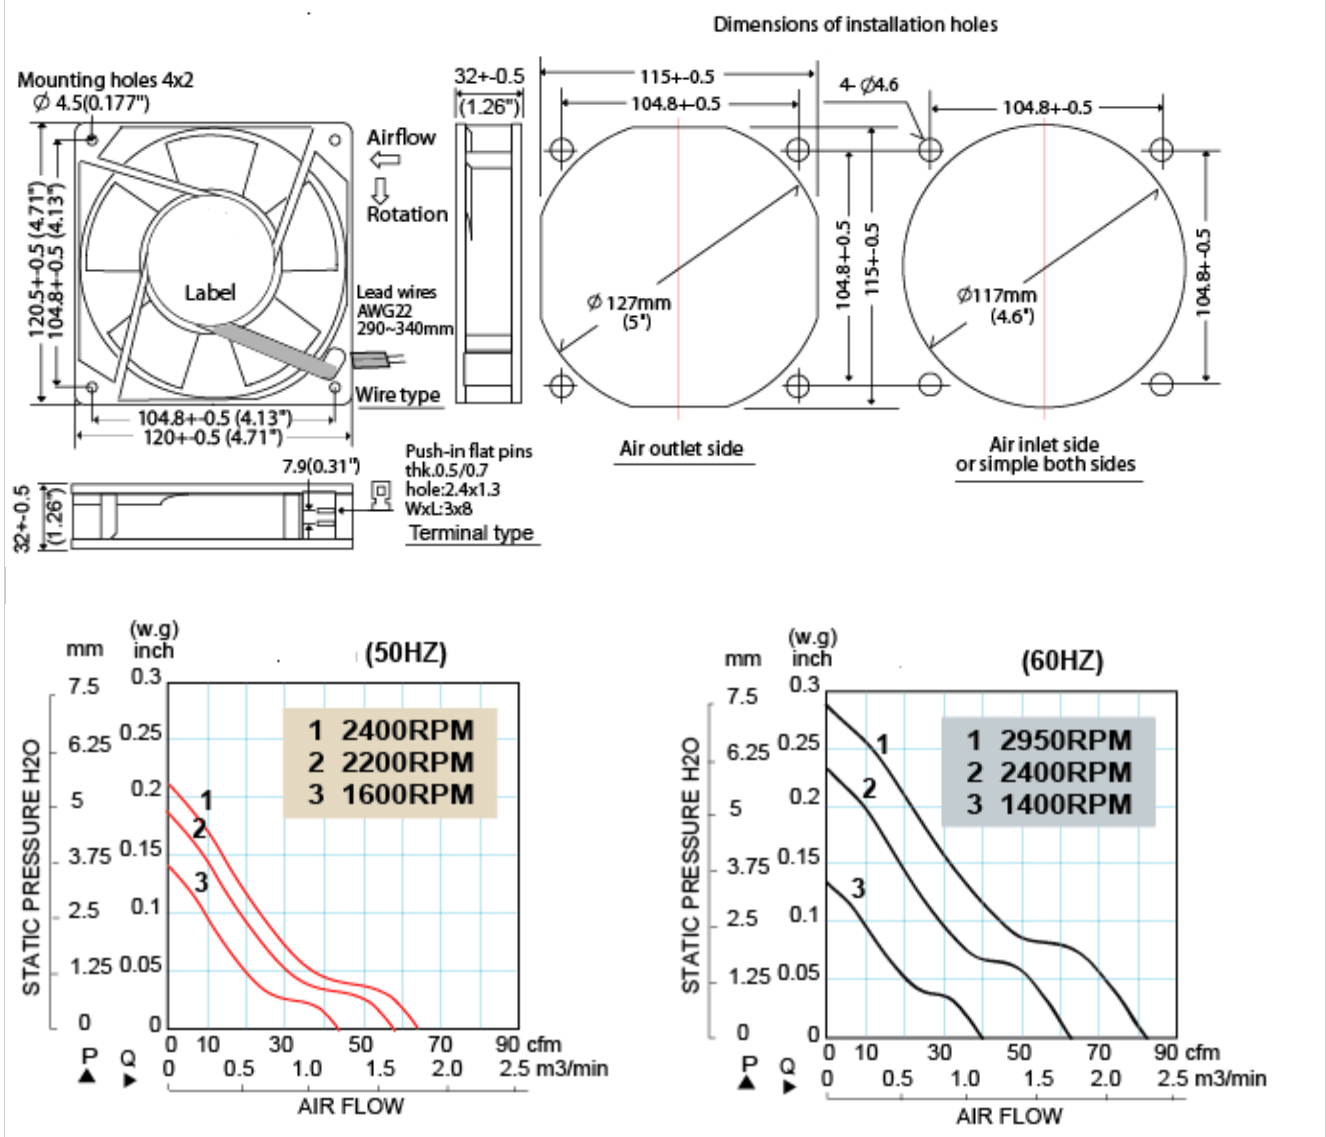

* TEI reserves the right to change data and specs without notice* Tests are at nominal rated voltage against zero static pressure*Specifications subject to change without notice, data tolerance +-10%